

OUTDOOR

Welded Aluminum I-Beam Tower

Marine Grade Aluminum, Welded Carriage Assembly

Industrial Grade Gearmotor

Meets ASME A18.1 Code for Vertical Platform Lifts and Wheelchair Lifts

Type "A" Instant Safeties ensure the carriage cannot fall in the unlikely event of the cables breaking or becoming slack.

OUTDOOR

RESIDENTIAL ELEVATOR




AmeriGlide

Accessibility
Solutions

Outdoor Elevator





System Overview

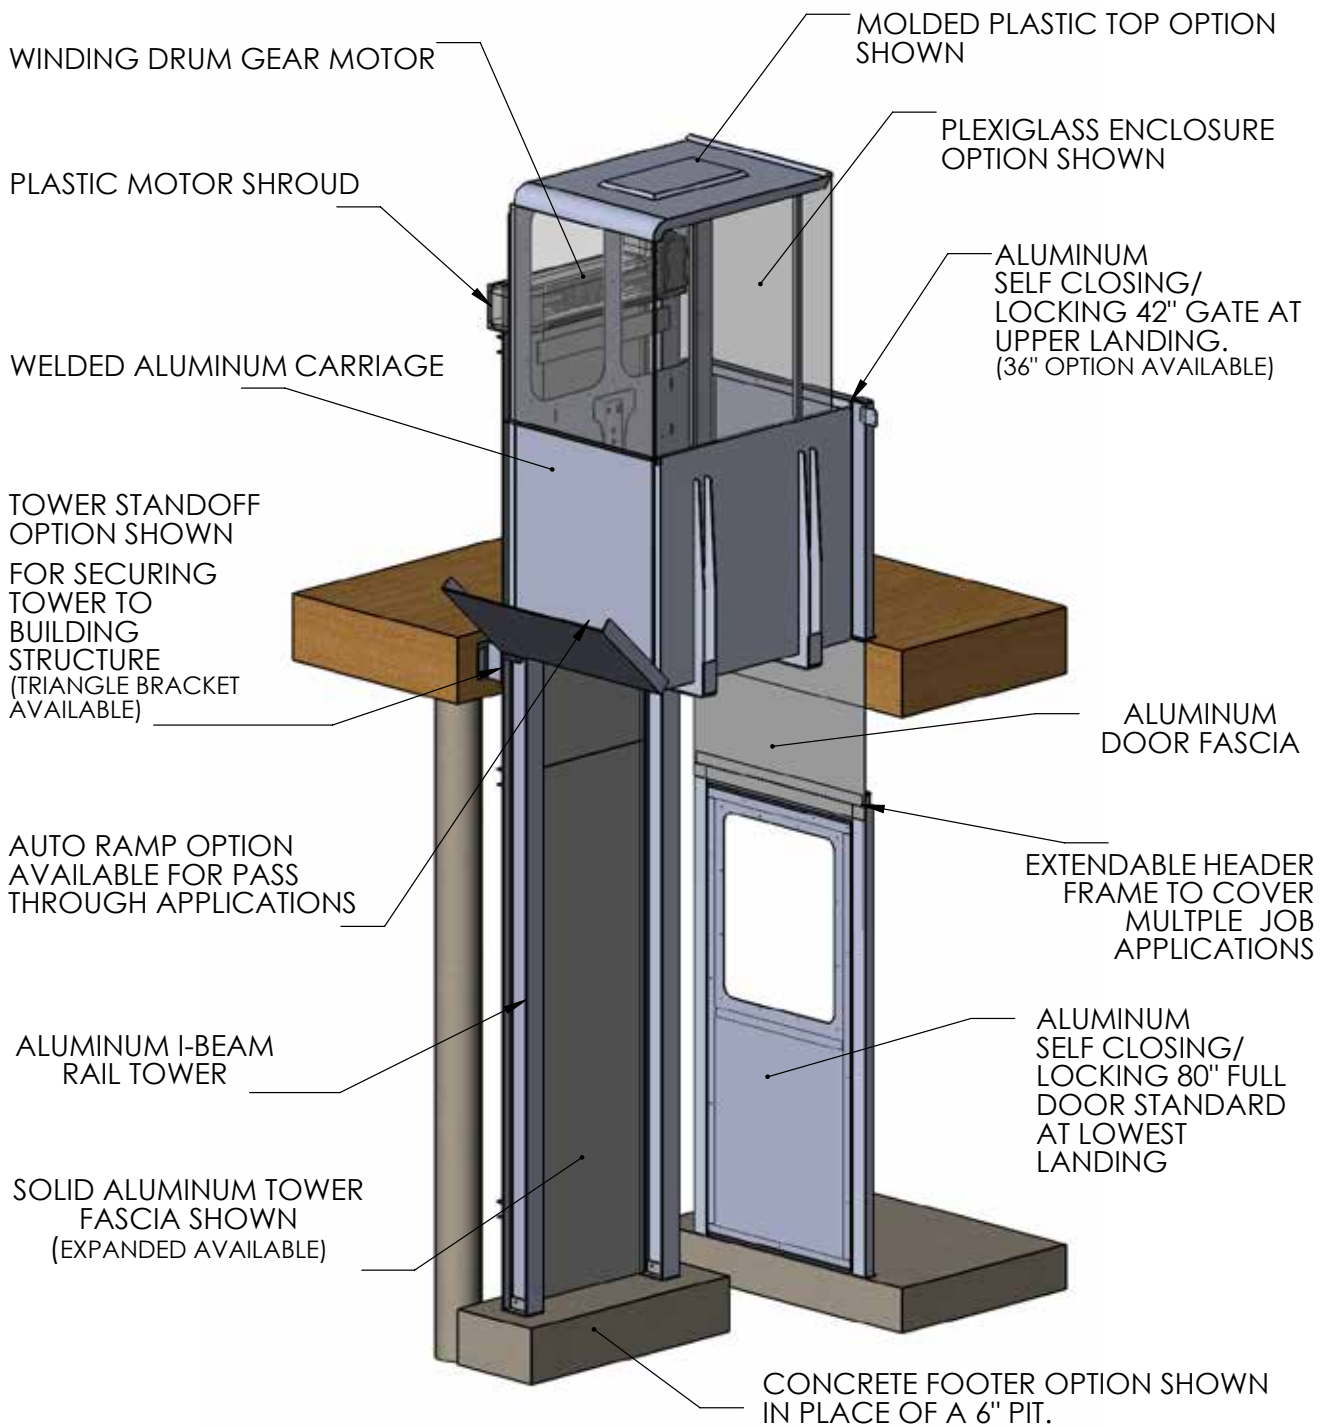

CONFIGURATIONS AVAILABLE



(FIXED RAMP AVAILABLE FOR APPLICATION WITHOUT THE OPTION OF A RECESSED PIT)

Pit Options

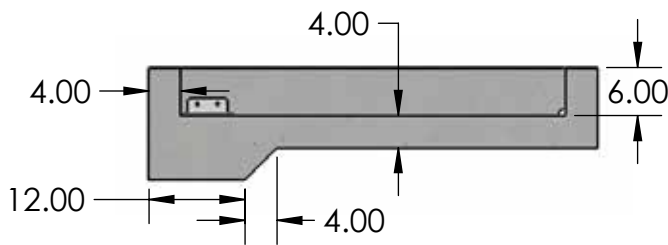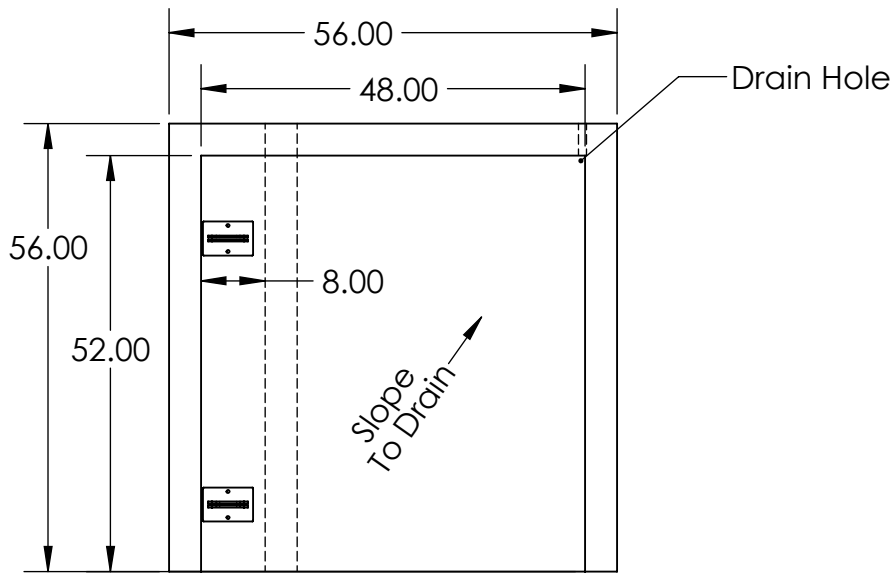

Typical 6" Pit

Optional Footer

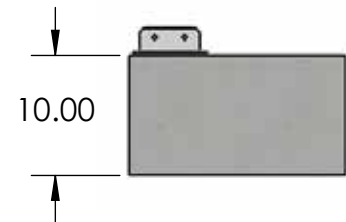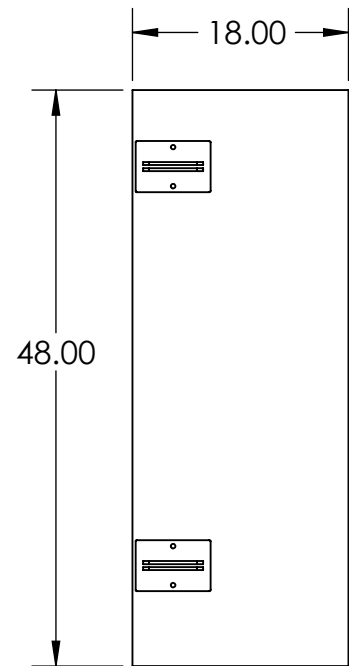

All concrete to be reinforced with #3 rebar @ slab/footer mid-depth.
6" depression recommended from bottom floor to slab/footer.

Technical Specs

- Runs on standard 110vac power
- 95% aluminum construction
- Standard platform 32" w x 48" d
- 500 lb capacity
- 24 fpm travel speed
- Soft start/stop PLC controller
- Constant pressure operation
- Industrial duty gearmotor
- Winding drum drivetrain
- Type "A" instant safeties
- Safety underpan stops lift if there is an obstruction below
- Meets ASME A18.1 code
- Typical Mill Finish Unit
- Self-closing doors and gates are equipped with safety interlocks to keep doors locked when the lift is away from the floor level.
- Plug N' Play wiring makes installation quick and easy
- Standard finish: mill finish aluminum
- Optional finish: Powder Coated in choice of white, gray, tan, or beige

OTHER AMERIGLIDE PRODUCTS YOU MIGHT BE INTERESTED IN



Stair Lifts



Dumbwaiters



Vertical Platform Lifts



Lift Chairs



Pool Lifts