

ELITE PLUS - ORDER FORM

Contact Name:

Job Name:

Phone:

Location:

Email:


Notes:

Company:


STANDARD FEATURES

Hydraulic 2:1 roped full 2-stop elevator package, 950lbs capacity, variable speed valve, submersed motor, automatic LED cab lighting, automatic emergency cab lowering, full automatic functionality, illuminated stainless steel car operator panel with phone and DPI, illuminated stainless steel call stations with DPOI, 4 LED pot lights, solid stainless steel handrail.

FINISHED HOISTWAY DIMENSIONS

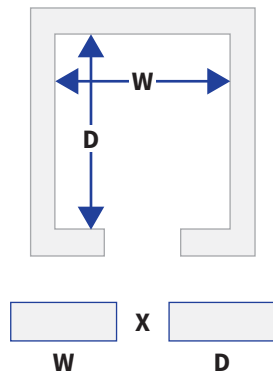

RAIL LOCATION

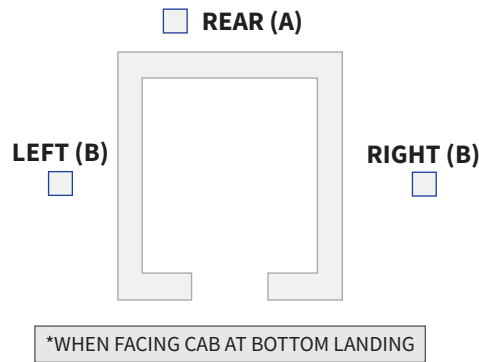

LANDINGS

- 2 4
- 3

HOISTWAY CONSTRUCTION

- WOOD
- CONCRETE

CAB MODEL

- 36 x 48 40 x 54
- 36 x 54 42 x 42
- 36 x 60 42 x 48






CAB CONFIGURATION

- FRONT OPENING
- PASS THROUGH
- 90 DEGREES



CAB HEIGHT & OVERHEAD REQUIREMENTS

CAB HEIGHT	OVERHEAD REQUIREMENTS	
<input type="checkbox"/> 7'0 (84")	<input type="checkbox"/> 8'0 (96")	<input type="checkbox"/> 8'7 (104")
<input type="checkbox"/> 8'0 (96")	<input type="checkbox"/> 9'0 (108")	<input type="checkbox"/> 10'0 (120")
	CAB GATE	CAB AUTO DOORS






CAB FINISHES

-  Alabaster Oak
-  Argento
-  Gibraltar
-  Kodiak
-  Palomino

CAB CEILING

-  Match Cab Finish
-  White


GATE FINISHES

-  Match Cab Finish
-  Polymer White
-  Polymer Black
-  Brushed Aluminum
-  Clear Acrylic

IMPORTANT

OVERHEAD: MINIMUM OVERHEAD REQUIREMENT IN RESIDENTIAL BUILDS IS 96 INCHES. SOME DOOR MODELS REQUIRE 104 INCHES.
PIT DEPTH: MINIMUM DEPTH REQUIREMENT IN RESIDENTIAL BUILDS IS 12 INCHES.

*OVERHEAD - THE DISTANCE FROM THE FINISHED FLOOR TO THE TOP OF THE HOISTWAY ON THE TOP LANDING

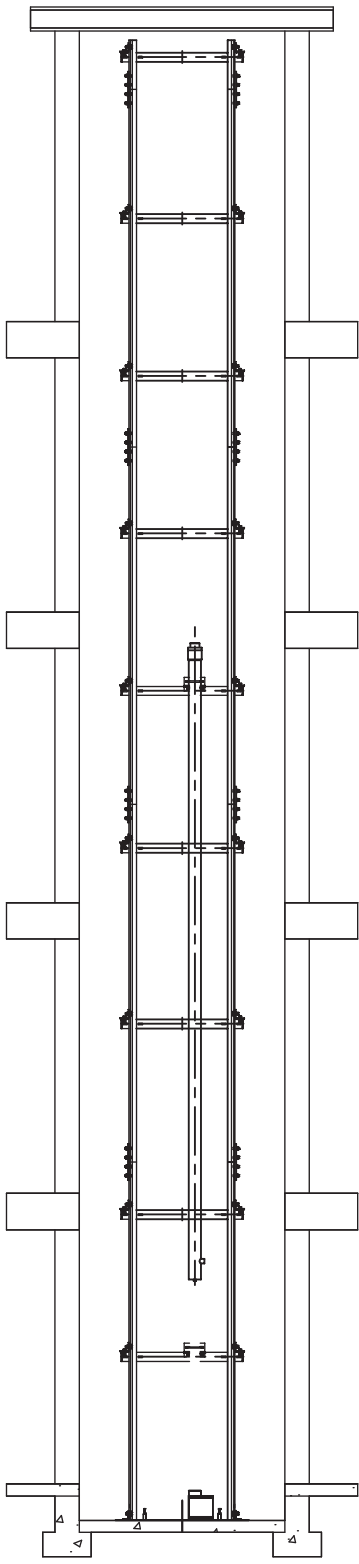

OVERHEAD *

STOP 4

STOP 3

STOP 2

STOP 1

PIT DEPTH*

CAB DOORS

- MANUAL 4 PANEL GATE (SELECT FINISH PREVIOUS PAGE)
- AUTOMATIC 4 PANEL GATE (SELECT FINISH PREVIOUS PAGE)
- 2-SPEED FULL AUTOMATIC SS (REQUIRES 62" WIDE HOISTWAY)
- 3-SPEED FULL AUTOMATIC SS (REQUIRES 54" WIDE HOISTWAY)

NOTE - SS DENOTES STAINLESS STEEL


LANDING DOORS

- LOCKS ONLY - DOOR BY OTHERS
- INTERIOR WOODEN FLUSH MOUNT DOOR (36"W X 80"H)
- EXTERIOR FLUSH MOUNT DOOR (36"W X 80"H)
- 1.5HR FIRE-RATED STEEL FLUSH MOUNT DOOR (36"W X 80"H)
- 2-SPEED FULL AUTOMATIC SS (REQUIRES 62" WIDE HOISTWAY)
- 3-SPEED FULL AUTOMATIC SS (REQUIRES 54" WIDE HOISTWAY)

NOTE - 2-SPEED AND 3-SPEED MUST MATCH CAB DOORS


LANDING DOOR SWINGS

- | | | |
|--------|-------------------------------------|------------------------------------|
| STOP 4 | <input type="checkbox"/> RIGHT HAND | <input type="checkbox"/> LEFT HAND |
| STOP 3 | <input type="checkbox"/> RIGHT HAND | <input type="checkbox"/> LEFT HAND |
| STOP 2 | <input type="checkbox"/> RIGHT HAND | <input type="checkbox"/> LEFT HAND |
| STOP 1 | <input type="checkbox"/> RIGHT HAND | <input type="checkbox"/> LEFT HAND |

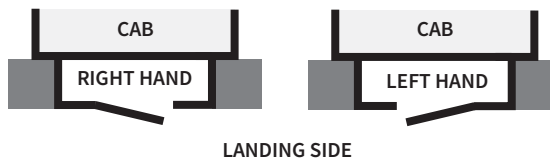

LANDING DOOR LOCATION

- | | | | | |
|--------|----------------------------|----------------------------|----------------------------|----------------------------|
| STOP 4 | <input type="checkbox"/> A | <input type="checkbox"/> B | <input type="checkbox"/> C | <input type="checkbox"/> D |
| STOP 3 | <input type="checkbox"/> A | <input type="checkbox"/> B | <input type="checkbox"/> C | <input type="checkbox"/> D |
| STOP 2 | <input type="checkbox"/> A | <input type="checkbox"/> B | <input type="checkbox"/> C | <input type="checkbox"/> D |
| STOP 1 | <input type="checkbox"/> A | <input type="checkbox"/> B | <input type="checkbox"/> C | <input type="checkbox"/> D |



*PIT - MINIMUM DEPTH REQUIREMENT IN RESIDENTIAL BUILDS IS 12 INCHES.